

Cat.6A S/FTP Patch Cord



The equip[®] Cat.6A S/FTP Patch Cord is composed of preeminent materials and fully-examined to comply with industrial standards. Offering higher bandwidth and better signal-to-noise margin, the Cat.6A cable is able to deliver ultrahigh and error-free performance in the most demanding network environments, especially for the 10G application.


| Key Feature

- 26AWG
- 500MHz
- Stranded
- PIMF (pairs in metal foil)
- Gold plated pins
- Molded boot
- Cable length printed on plug
- Halogen free LSZH

| Typical Applications

- IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T ; 10GBASE-T
- IEEE 802.5 16 MB; ISDN; TPDDI; ATM


| Structure

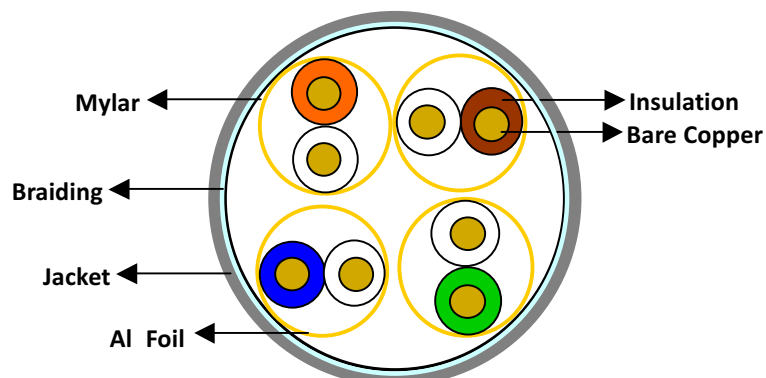

| Specification

Conductor	Material	Bare Copper
	Construction	26AWG, 7/0.152 ± 0.005mm
Insulation	Thickness	MIN at any point: 0.2 mm / MAX AVG:0.35 mm
	Diameter	1.05 ± 0.05mm
	Colors	Blue-White/Blue, Orange-White/Orange, Green-White/Green, Brown-White/Brown
Jacket	Material	LSZH
	Thickness	MIN at any point: 0.50mm / MAX AVG: 0.60mm
	Diameter	6.1 ± 0.2mm

| Ordering Information

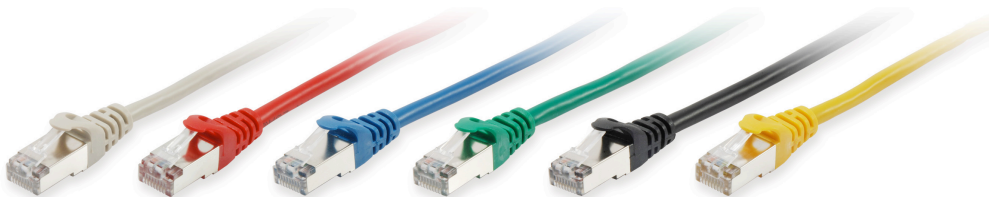

	White	Black	Blue	Yellow	Green	Red	Orange
0.25m	606001	606101	606201	606301	606401	606501	606601
0.5m	606002	606102	606202	606302	606402	606502	606602
1.0m	606003	606103	606203	606303	606403	606503	606603
2.0m	606004	606104	606204	606304	606404	606504	606604
3.0m	606005	606105	606205	606305	606405	606505	606605
5.0m	606006	606106	606206	606306	606406	606506	606606
7.5m	606007	606107	606207	606307	606407	606507	606607
10m	606008	606108	606208	606308	606408	606508	606608
15m	606009	606109	606209	606309	606409	606509	606609
20m	606010	606110	606210	606310	606410	606510	606610
30m	606011	606111	606211	606311	606411	606511	606611

Packing: equip zip bag